




# CIRCUIT DIAGRAM

GIET 02 RGB (via DMX512 control)

Cut Sheet #9T091

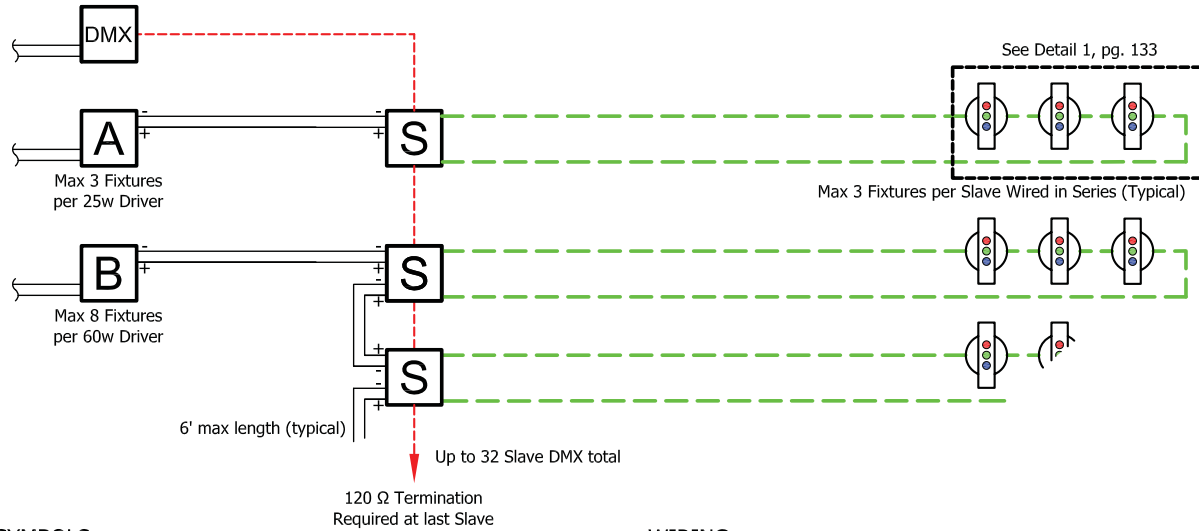

### SYMBOLS


- DMX controller  
BMASTER-DMX/INC or other DMX512 controller
- Slave DMX  
BSLAVE-DMX-6x3
- 25w 24v Driver  
90-277v 50/60 Hz
- 60w 24v Driver  
100-277v 50/60 Hz
- Fixture with 6 x 1w 3.2v 350mA RGB LEDs

### WIRING

- Line Voltage Input
- 24V - (2) 18AWG - 66' max total length
- DMX - (1) Belden 9729 - 656' max total length
- 24V - (3) 18AWG - 66' max total length

# CIRCUIT DIAGRAM

GIET 02 RGB (via proprietary RGB control)

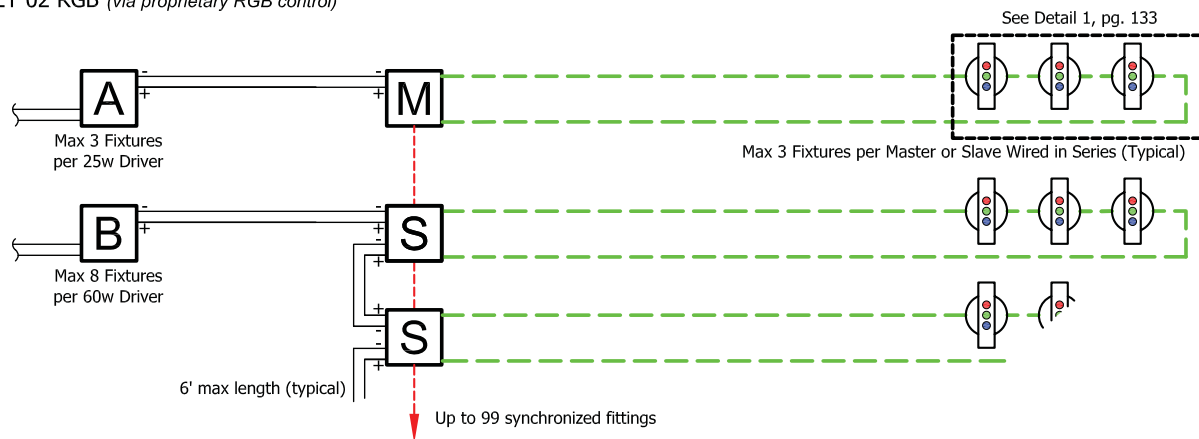

### SYMBOLS

- Master RGB  
BMASTER-RGB-5x3 or BMASTER-RGB-5x3I
- Slave RGB  
BSLAVE-RGB-5x3
- 25w 24v Driver  
90-277v 50/60 Hz
- 60w 24v Driver  
100-277v 50/60 Hz
- Fixture with 6 x 1w 3.2v 350mA RGB LEDs

### WIRING

- Line Voltage Input
- 24V - (2) 18AWG - 66' max total length
- RGB SIGNAL - (2) Shielded Twisted Pairs - 656' max total length
- 24V - (3) 18AWG - 66' max total length