




CIRCUIT DIAGRAM

LUX RGB, GIET 01 RGB (via DMX 512 control)

Cut Sheet #9T141

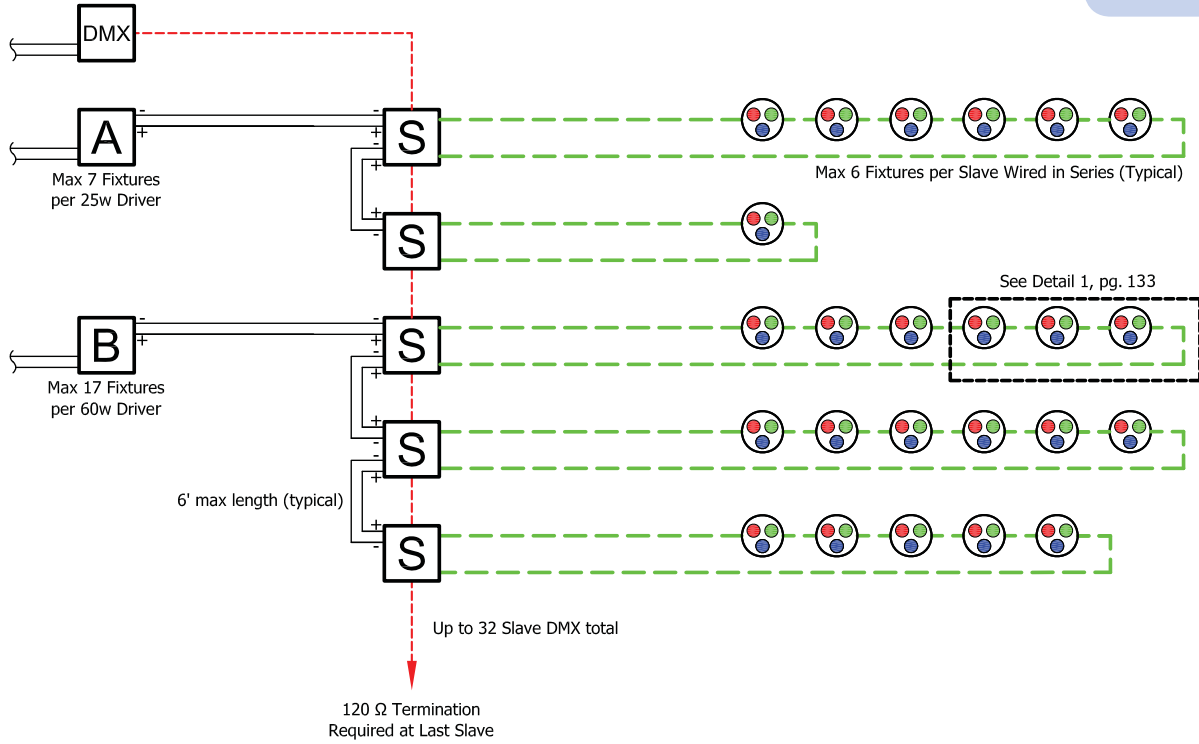

SYMBOLS

- DMX controller
BMASTER-DMX/INC or other DMX512 controller
- Slave DMX
BSLAVE-DMX-6x3
- 25w 24v Driver
90-277v 50/60 Hz
- 60w 24v Driver
100-277v 50/60 Hz
- Fixture with 3 x 1w 3.2v 350mA RGB LEDs

* NOTE: 100w Driver also available.


WIRING

- Line Voltage Input
- 24V - (2) 18AWG - 66' max total length
- DMX - (1) Belden 9729 - 656' max total length
- 24V - (3) 18AWG - 66' max total length



CIRCUIT DIAGRAM

BOOKLED 01, BOOKLED 02, BOOKLED 03, BOOKLED 04, WALK SYSTEM LED 03

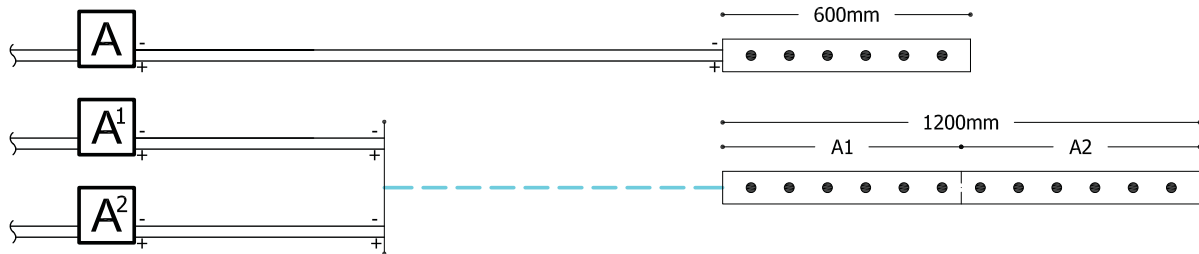

SYMBOLS

- 10w 350 mA Driver
100-240v 50/60 Hz
- 6 x 1w 3.2v 350mA LEDs

WIRING

- Line Voltage Input
- 350mA - (2) 18AWG - 66' max total length
- 350mA - (4) 18 AWG - 66' max total length